




- Ideal solution for connected single-home and apartment blocks.
- Release lever system protected by a trilobe key; can be remote activated via steel cable.
- Simplified connections and one, three-conductor cable.
- Fully covered and protected endless screw.
- On-board mechanical stops, for controlling gate travel.
- Silent and linear movement thanks to the conical torque reducer.
- Hard-wired and wireless self-diagnosing safety devices and compliance with current regulatory standards on impact forces.

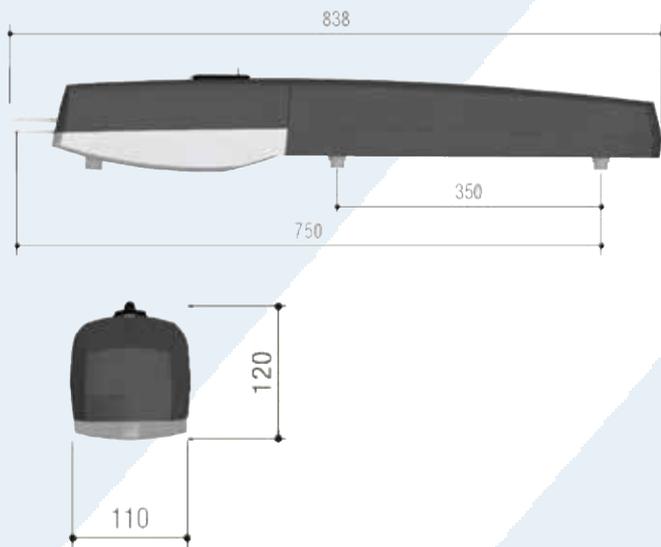

TECHNICAL SPECIFICATIONS	
Protection rating (IP)	44
Power supply to motor (V)	24 DC
Absorption (A)	5 Max.
Power (W)	120
Maneuvering time at 90° (s)	15*
Duty/cycle (%)	50
Torque (Nm)	400 ÷ 2000
Operating temperature (°C)	-20 ÷ +50
Max. length of leaf (m)	2.5
Max. weight of leaf (kg)	250
Max. leaf opening (°)	115

* Suggested minimum value with maximum travel speed and minimum slow-down speed.

CODE	NAME	DESCRIPTION
USWN25-010	AXI25 Kitset	2 - AXI Operators, 1 - ZL65 Control Panel, 1 - AF43S Receiver, 2 - 432EE Remote Controls, 1 - KLED24 Flashing Light, 1 - DIR10 Photocells.
SWN25	AXI25 Operator	1 - AXI25 Operator

Accessories

ZL65



Control panel for one or two leaf swing gates, with programming display, on-board radio decoding and self-diagnosing safety devices.

RLB



Circuit board for battery back up

R700



Card for decoding and access control with transponder

R800



Control board for decoding and access-control management via keypad

RSE



Interface card for controlling two operators